


Philips  
Scart cable

5 m

Composite A/V + S-Video

SWV5535

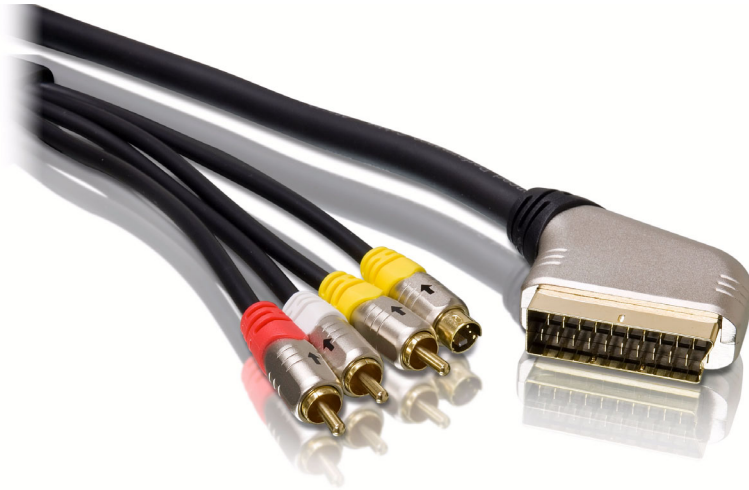

## Create a superior viewing experience

with this scart cable

Take your components to superior performance. This high end cable offers an improved connection for transferring audio/video signals between components.

### Enjoy better picture quality

- 24 carat gold-plated connectors optimize signal

### Enjoy better audio quality

- 4-Cut connectors for secure connections
- Stranded conductor extends durability

### Protects against signal loss

- 100% aluminum shielding
- Oxygen-free copper conductor for ideal signal transfer
- Copper braided reinforced aluminum shielding
- Foam Polyethylene (FPE) Dielectric

### Easy installation

- Non-slip ergonomic grip for easy use
- Plug and play for easy use

**PHILIPS**  
sense and simplicity

Scart cable  
5 m Composite A/V + S-Video

## Specifications

### Packaging Data

- Quantity: 1
- EAN/UPC/GTIN: 87 10895 93455 8
- Gross weight: .74 kg
- Tare weight: .13 kg
- Net weight: .61 kg
- Length: 265 mm
- Width: 195 mm
- Height: 100 mm

### Inner Carton

- EAN/UPC/GTIN: 87 10895 97054 9
- Quantity: 2
- Gross weight: 1.82 kg
- Tare weight: .6 kg

- Net weight: 1.22 kg
- Length: 280 mm
- Width: 175 mm
- Height: 210 mm

### Outer Carton

- EAN/UPC/GTIN: 87 10895 97055 6
- Quantity: 4
- Gross weight: 4.31 kg
- Tare weight: 1.87 kg
- Net weight: 2.44 kg
- Length: 370 mm
- Width: 300 mm
- Height: 230 mm

SWV5535/I0

## Product highlights

### 24 carat gold-plated connector

24 carat gold-plated connectors ensure the best signal quality for your components.

### 4-Cut connectors

4-Cut connectors ensure secure connections between your component and your cable.

### 100% aluminum shielding

This protective layer of aluminum guards against electromagnetic interference for improved signal quality.

### Twisted high purity OFC

This oxygen-free copper conductor provides the highest accuracy in signal transfer with minimal resistance.

### Braided shielding

Copper braided reinforced aluminum shielding protects against signal loss and interference.

### FPE Dielectric

Foam Polyethylene (FPE) dielectric is a superior insulation material that protects against signal loss.

### Easy grip

This non-slip grip makes connecting your components easy and ergonomically comfortable.

### Plug and play

Plug and play offers easy installation of components without time-consuming installations.



Issue date 2008-04-13

Version: 2.0.4

12 NC: 9082 100 06354  
EAN: 87 10895 93457 2

© 2008 Koninklijke Philips Electronics N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips  
Electronics N.V. or their respective owners.

[www.philips.com](http://www.philips.com)